


# Series 2165

## "Rock Drill 400"

### Heavy Duty Air Hose

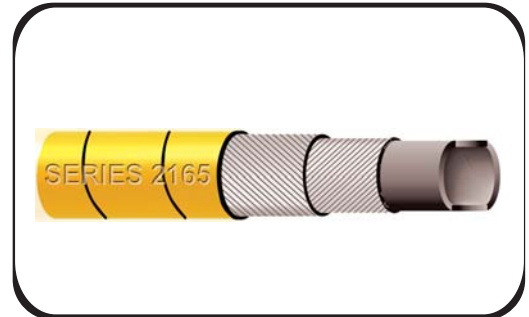

A heavy-duty air hose designed for rough industrial applications as well as severe service in mines, quarries, and construction jobs. **Specially designed for superior flexibility and kink resistance.**

<b>Tube:</b>	Black synthetic rubber (ARPM Class C ORS)
<b>Reinforcement:</b>	Multiple textile plies. (Proprietary Design)
<b>Cover:</b>	Yellow SBR/EPDM blend (ARPM Class C ORS)
<b>Temperature:</b>	-20°F to +180°F (-29°C to +82°C)
<b>Branding:</b>	Embossed

Part #	I.D. (In)	O.D. (In)	W.P. (PSI)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
2165-050	1/2	.87	400	.23	100'	Yes
2165-075	3/4	1.23	400	.45	100'	400'
2165-100	1	1.50	400	.58	100'	Yes
2165-125	1-1/4	1.77	400	.74	100'	400'
2165-150	1-1/2	2.04	400	.86	100'	400'
2165-200	2	2.55	400	1.11	100'	Yes
2165-300	3	3.63	400	2.15	50'/100'	400'

# Series 2168

## "Rock Drill 400"

### Heavy Duty Air Hose



A heavy-duty air hose designed for rough industrial applications as well as severe service in mines, quarries, and construction jobs. **Specially designed for superior flexibility and kink-resistance.**

<b>Tube:</b>	Black synthetic rubber (ARPM Class C ORS). Resistant to oil mist
<b>Reinforcement:</b>	Multiple textile plies (Proprietary Design)
<b>Cover:</b>	Green SBR/EPDM blend (ARPM Class C ORS)
<b>Temperature:</b>	-20°F to +180°F (-29°C to +82°C)
<b>Branding:</b>	Embossed Lay Line

Part #	I.D. (In)	O.D. (In)	W.P. (PSI)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
2168-050	1/2	.87	400	.23	100'	Yes
2168-075	3/4	1.23	400	.45	100'	400'
2168-100	1	1.50	400	.58	100'	Yes
2168-125	1-1/4	1.77	400	.74	100'	400'
2168-150	1-1/2	2.04	400	.86	100'	400'
2168-200	2	2.55	400	1.11	100'	Yes
2168-300	3	3.63	400	2.15	50'/100'	400'