


Series 1805

Polyurethane Lined Abrasion Resistant PVC Material Handling Hose - HD (Dry Application)

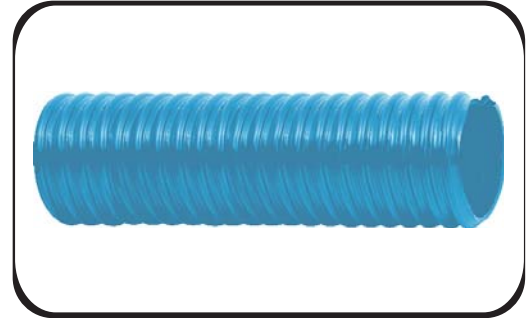

For conveying of solids where high abrasive conditions are present. Specially formulated, static-dissipating HMV PVC compound provides sub-zero flexibility. The thick, smooth, heavy duty polyurethane lining eliminates material build up.

Tube:	Polyurethane Lined (static dissipating)
Reinforcement:	High density rigid PVC helix
Cover:	Blue HMV PVC - Convoluted
Temperature:	-40°F to +150°F (-40°C to +65°C)

Part #	I.D. (In)	O.D. (In)	Approx. Liner Thickness (mm)	Vacuum Rating (In Hg) @ 70°F	W.P. @ 70°F (PSI)	Bend Radius @ 70°F (In)	Weight (Lbs / Ft)	Std. Length	Stock (Yes) or Min. Order
1805-200	2	2.44	1.2	29	40	4.0	.65	100'	Yes
1805-300	3	3.70	1.8	29	40	6.0	1.23	100'	Yes
1805-400	4	4.80	2.0	29	35	10.0	2.02	100'	Yes
1805-600	6	6.87	2.3	28	30	18.0	3.84	50'/100'	Yes
1805-800	8	9.18	2.7	28	30	22.0	6.52	20'/50'	Yes