


**ULTRA-SPOOL
STYLE 1501
Hand-Built
Expansion Joint**

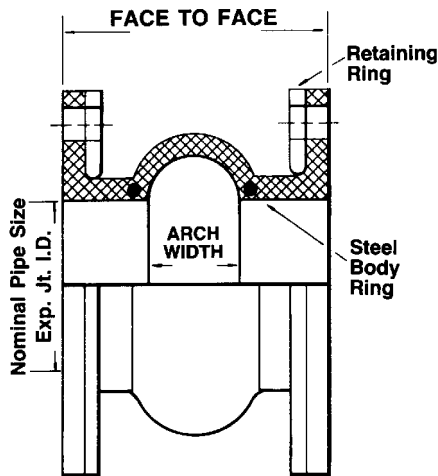

Construction, Materials:

Tube Elastomer: *Chlorobutyl*
Cover Elastomer: *Chlorobuty*
Reinforcing: *Polyester & Steel*
Flanges: *Integral Duck & Rubber 150# ANSI*
Retaining Rings: *Split Steel-Galvanized*
Maximum *250 °F.*
Operating Temp:
Vacuum Rating: *26 In. Hg.*

Are Control Units Specified?: Yes No
If So, Type of Material: Galvanized/Plated Steel Stainless

Qty	Size (Inches)	Face to Face (Inches)	Flange Thick (Inches)	No. of Holes	Hole Size (Inches)	Movements				Oper Press (PSIG)	Wgt Jt. (Lbs)
						Axial Comp (Inches)	Axial Elong (Inches)	Lateral Deflect (Inches)	Angular Deflect (Deg)		
	1-1/2	6	7/16	4	5/8	1.20	.60	.60	39	225	3
	2	6	9/16	4	3/4	1.75	.75	.75	35	225	4
	2-1/2	6	9/16	4	3/4	1.75	.75	.75	30	225	4.5
	3	6	9/16	4	3/4	1.75	.75	.75	30	225	5.5
	4	6	9/16	8	3/4	1.75	.75	.75	25	225	8
	5	6	9/16	8	7/8	1.75	.75	.75	25	225	9
	6	6	5/8	8	7/8	1.75	.75	1	20	225	11
	8	6	3/4	8	7/8	1.75	.75	1	20	225	15
	10	8	3/4	12	1	1.75	.75	1	15	225	23
	12	8	3/4	12	1	1.75	.75	1	13	225	34
	14	8	7/8	12	1-1/8	1.75	.75	1	11	225	40
	16	8	7/8	16	1-1/8	1.75	.75	1	10	160	47
	18	8	1	16	1-1/4	1.75	.75	1	9	160	60
	20	8	1	20	1-1/4	1.75	.75	1	8	130	67
	24	10	1	20	1-3/8	1.75	1	1	7	130	79
	30	10	1	28	1-3/8	1.75	1	1	5	95	117
	36	10	1	32	1-5/8	2.25	1.25	1	6	90	143
	42	12	1-3/16	36	1-5/8	2.25	1.25	1	5	90	193
	48	12	1-3/16	20	1-1/4	2.25	1.25	1	5	90	211
	54	12	1-3/16	44	2	2.25	1.25	1	2.5	85	265
	60	12	1-3/16	52	2	2.25	1.25	1	2.3	85	309
	72	12	1-3/16	60	2	2.25	1.25	1	1.9	85	385

* Operating pressure rated at 70° F. Contact Unisource for pressure ratings at higher temperatures.

Customer: _____
 Project: _____
 Engineer: _____
 PO#: _____



*Unisource Ultra-Spool Style 1501
Butyl Rubber Expansion Joint*